


**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: 3/4" x 12' solid aluminum rod with aluminum cap
 STATE PLANE COORDINATES: N: 507212.60
 E: 2523821.89
 ELEVATION: 866.11 M.S.L. DATUM: 1929
 THETA ANGLE: _____
 FIELD BOOK: 3 PAGE: 26
 FIELDWORK BY: TOM GENSKE 1996, KAPUR AND ASSOCIATES 1998
 RECORD DRAWN BY: MARK BANTON
 CONTROL ACCURACY:
 HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 507
 SECTION 31
 TOWNSHIP 11
 RANGE 21

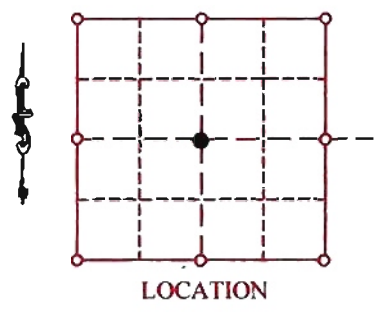

BASIS OF MONUMENT LOCATION

1996 - TOM GENSKE, OZAUKEE COUNTY SURVEYOR FOUND AND ACCEPTED A 1" X 6' IRON PIPE AS CENTER AND REPLACED WITH A 3/4" x 12' ALUMINUM ROD W/ CAP
 1998 - KAPUR AND ASSOCIATES ESTABLISHED CO-ORDINATES AS PART OF OZAUKEE COUNTY REMONUMENTATION PROGRAM


SEAL:



DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
 Ozaukee County Surveyor
 DATE: 9/16/08

TIE SKETCH

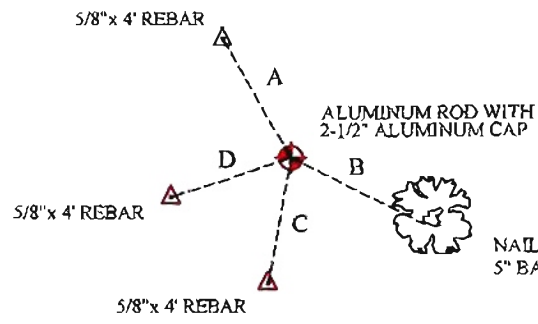

- A = 26.98' @ 346°27'
- B = 31.55' @ 130°
- C = 28.78' @ 181°06'
- D = 24.92' @ 260°49'

MAINTENANCE RECORD

- MONUMENT LEGEND**
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
DEC 2008	M. BANTON	Redraw from tie sheet and re-number corner