

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"  
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: 3/4"x 12' solid aluminum rod with aluminum cap

STATE PLANE COORDINATES: N: 507387.28

E: 2529082.15

ELEVATION: 866.61 M.S.L. DATUM: 1929

THETA ANGLE: \_\_\_\_\_

FIELD BOOK: 3 PAGE: 28


FIELDWORK BY: TOM GENSKE 1996, KAPUR AND ASSOCIATES 1998

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 509  
SECTION 32  
TOWNSHIP 11  
RANGE 21

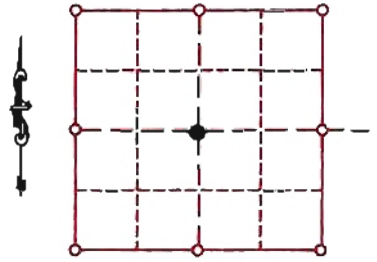

LOCATION

**BASIS OF MONUMENT LOCATION**

1996 - TOM GENSKE, OZAUKEE COUNTY SURVEYOR A 3/4" X 12' ALUMINUM ROD ON A STRAIGHT LINE INTERSECTION

1998 - KAPUR AND ASSOCIATES ESTABLISHED CO-ORDINATES AS PART OF OZAUKEE COUNTY REMONUMENTATION PROGRAM

SEAL:




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

*Mark Banton*  
Ozaukee County Surveyor

DATE: 11 Dec 2008

**TIE SKETCH**

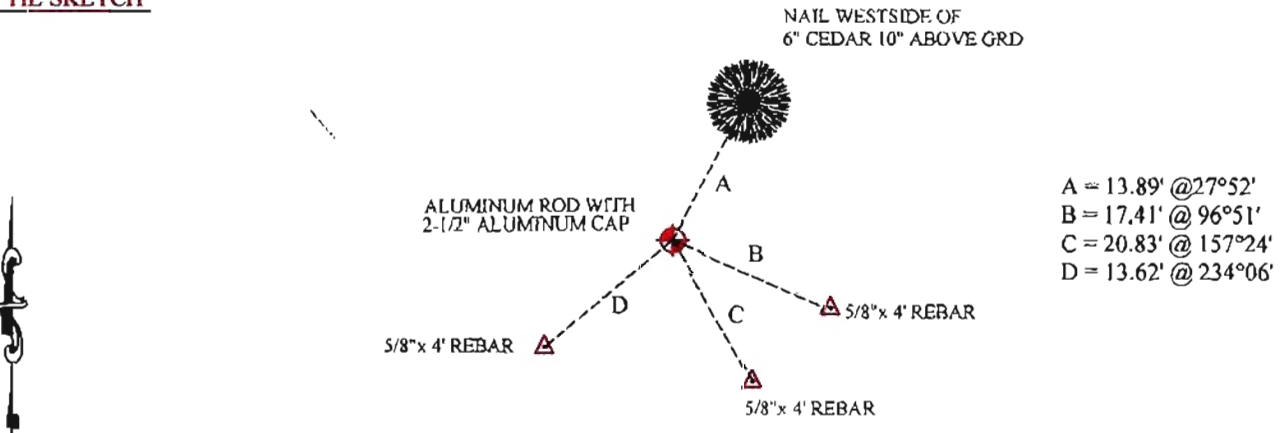

**MAINTENANCE RECORD**

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
DEC 2008	M. BANTON	Redraw from tie sheet and re-number corner