


**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: Berntsen aluminum monument
 STATE PLANE COORDINATES: N: 556803.26
 E: 2583352.20
 ELEVATION: 637.49 M.S.L. DATUM: 1929

CORNER INDEX No. 958
 SECTION 13
 TOWNSHIP 12
 RANGE 22

FIELD BOOK: _____ PAGE: _____
 FIELDWORK BY: Tom Genske 1993
 RECORD DRAWN BY: MARK BANTON
 CONTROL ACCURACY:
 HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER



SEAL:



BASIS OF MONUMENT LOCATION

USING SIX WITNESS MONUMENTS, I FOUND PK NAIL IN THE PAVEMENT SURFACE. LIMESTONE MONUMENT CALLED FOR IN L. TOUSLEY'S 1878 REMONUMENTATION MAP WAS FOUND 9 INCHES BELOW PK NAIL. ACCEPTED LIMESTONE MONUMENT AS CORNER, REPLACED WITH ALUMINUM MONUMENT WITH 2" RISER. CORNER IS 5 FEET WEST OF PAVEMENT CENTERLINE

MARK BANTON - REDRAWN USING TOM'S TIE SHEET TO SHOW CO-ORDINATES AND ELEVATION


DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton 3 Feb 07
 Ozaukee County Surveyor

DATE: 01-05-2005

TIE SKETCH

- A = 41.16'
- B = 47.53'
- C = 33.00'
- D = 25.03'
- E = 48.63'
- F = 39.11'

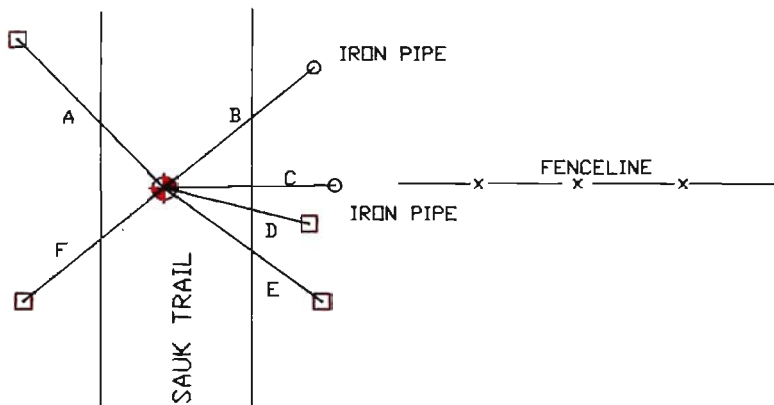

MAINTENANCE RECORD

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
3 FEB 07	M.BANTON	RE-NUMBER CORNER