

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

CORNER INDEX No. 369
 SECTION 18
 TOWNSHIP 10
 RANGE 21

TYPE OF MONUMENT: Concrete monument with Brass cap

STATE PLANE COORDINATES: N: 490582.97

E: 2517641.81

ELEVATION: 887.90 M.S.L. DATUM: 1929


FIELD BOOK: Book 2 PAGE: 54

FIELDWORK BY: Tom Genske & Kapur and Associates 1994

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

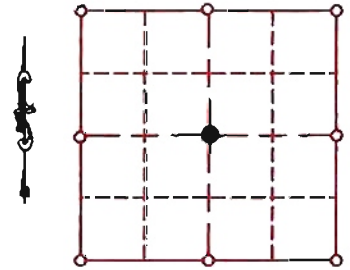

LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

Tom Genske (county surveyor) found and accepted 2" IP called for on CSM. Replaced with a concrete monument with brass cap, monument 1' east of wire fence.




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
 Ozaukee County Surveyor

DATE: 1-09-08

TIE SKETCH

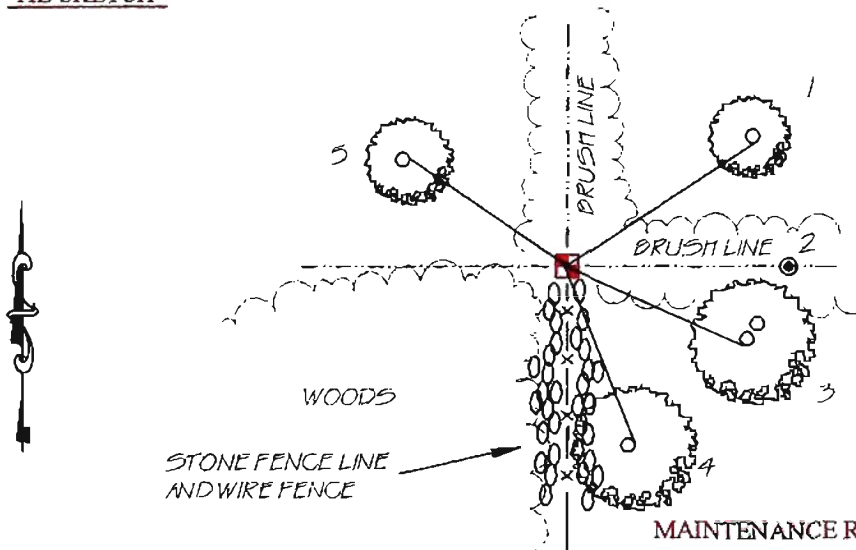

1. D11 nail & disc southeasterly side of 7" maple 1.8' above grd. Dist. = 119"
2. Found 1" IP. Dist = 45'
3. D11 nail southerly side of south 10" twin elm 2.5' above grd. Dist = 7.80'
4. D11 nail & disc east side of 1 3/4" elm. 2' above grd. Dist = 21.06'
5. Spike east side of 10" maple 6" above grd. Dist = 65"

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

| DATE | BY WHOM | REMARKS |
|---------|-----------|------------------|
| 1-09-08 | M. Banton | re-number corner |
| | | |
| | | |