

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Bernten plastic monument w/brass cap

STATE PLANE COORDINATES: N: 507616.96

E: 2537009.87

ELEVATION: 844.75 M.S.L. DATUM: 1929

THETA ANGLE: _____

FIELD BOOK: 2 PAGE: 35


FIELDWORK BY: TOM GENSKE 1994

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No.	<u>512</u>
SECTION	<u>33</u>
TOWNSHIP	<u>11</u>
RANGE	<u>21</u>



LOCATION

SEAL:

BASIS OF MONUMENT LOCATION

1974 - Harry Brabender - found old limestone monument approximately 9" deep in good condition. set concrete monuments for ties

1994 - Tom Genske - Ozaukee County Surveyor using concrete monument ties, found Pk nail 1" below pavement surface, 2nd Pk nail found 2 1/2" below top Pk nail limestone monument with damaged top found 12" below pavement surface center checked with PK nails. accepted and replaced limestone with Berntsen Plastic monument cor 2.5' west of pavement c/l




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
 Ozaukee County Surveyor

DATE: 11/10/08

TIE SKETCH

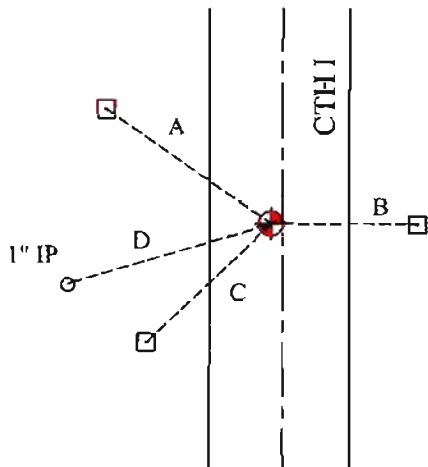

- A = 34.19' @ 303°
- B = 25.20' @ 86°
- C = 39.26' @ 224°
- D = 45.08' @ 232°

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
11/10/08	M. BANTON	Redraw from tie sheet and re-number corner