

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Bernsten aluminum monument

STATE PLANE COORDINATES: N: 531357.38

E: 2533622.32

ELEVATION: 891.21 M.S.L. DATUM: 1929

THETA ANGLE: _____

FIELD BOOK: 2 PAGE: 37

FIELDWORK BY: TOM GENSKE 1994

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 706

SECTION 9

TOWNSHIP 11

RANGE 21

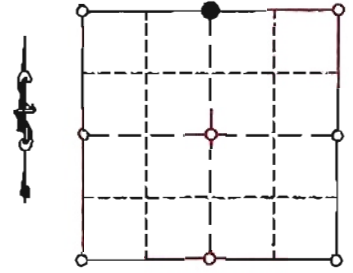

LOCATION

BASIS OF MONUMENT LOCATION

1974 - Harry Brabender - dug 8'x8'x3' hole and found nothing used R/R spike found and set concrete monuments from it

1994 - Tom Genske - Ozaukee County Surveyor using existing concrete monument ties found PK nail 2" below road surface, nothing else found, accepted PK nail and replaced with Bernsten aluminum monument

SEAL:




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark H. Banton
 Ozaukee County Surveyor

DATE: 11/10/08

TIE SKETCH

- A = 28.37' @ 356°
- B = 58.87' @ 121°
- C = 33.00' @ 182°
- D = 43.90' @ 229°

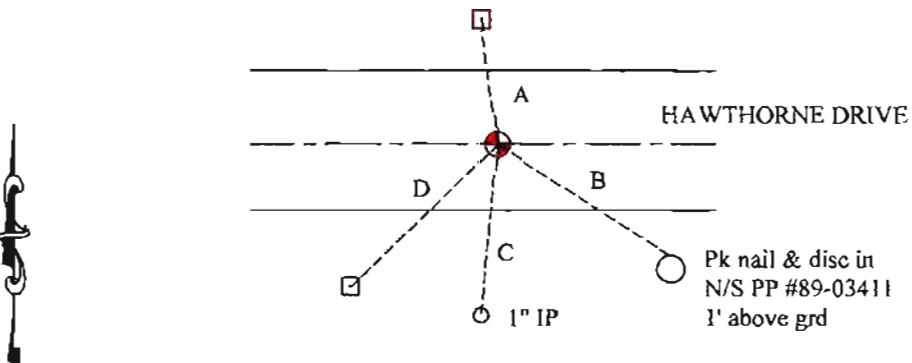

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNSTEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
11/10/08	M. BANTON	Redraw from tie sheet and re-number corner